

Queensland  
Collection

# Rustic Tweed

Cable and Moss Stitch Cardigan





# CABLE AND MOSS STITCH CARDIGAN

## YARN

Queensland Collection **RUSTIC TWEED**

|      | A  | B  | C   | D   |    |
|------|----|----|-----|-----|----|
| Bust | 80 | 90 | 100 | 110 | cm |

## Col. No. Quantity x 100g skeins

|           |   |   |   |   |
|-----------|---|---|---|---|
| 108 Teale | 5 | 5 | 6 | 7 |
|-----------|---|---|---|---|

## NEEDLES

1 pair 4.00mm needles (US 6)

1 pair 3.75mm needles (US 5)


1 cable needle

## TENSION/GAUGE

21 sts and 38 rows measured over 10 cm of Moss St using 4.00mm needles.

## ADDITIONAL REQUIREMENTS

3 Buttons

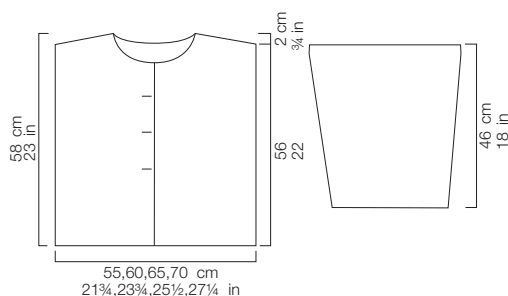

## SPECIAL ABBREVIATIONS

**T2B** (Twist 2 Back) slip next st onto cable needle and hold at back of work, knit next st from left-hand needle, then purl st from cable needle.

**T2F** (Twist 2 Front) slip next st onto cable needle and hold at front of work, purl next st from left-hand needle, then knit st from cable needle.

**T4B** (Twist 4 Back) slip next 2 sts onto cable needle and hold at back of work, knit next 2 sts from left-hand needle, then purl sts from cable needle.

**T4F** (Twist 4 Front) slip next 2 sts onto cable needle and hold at front of work, purl next 2 sts from left-hand needle, then knit sts from cable needle.

**C2B or C2F** (Cross 2 Back or Front) knit into front (or back) of 2nd st on needle, then knit first st, slipping both sts off needle at the same time.

**C4B or C4F** (Cable 4 Back or Front) slip next 2 sts onto cable needle and hold at back (or front) of work, knit next 2 sts from left-hand needle, then knit sts from cable needle.

## Moss St

**Row 1** \* K1, p1; rep \* to end.

**Row 2** Purl all the knit sts and knit all the purl sts as they face you.

Rep row 2 throughout.

## Cable Panel (24 sts)

**Row 1** (RS) K2, p4, T4F, p1, C2B, p1, T4B, p4, k2.

**Row 2** P2, k6, [p2, k1] twice, p2, k6, p2.

**Row 3** T4F, p4, T4F, T4B, p4, T4B.

**Row 4** K2, p2, k6, p4, k6, p2, k2.

**Row 5** P2, C4F, p4, T2F, T2B, p4, C4B, p2.

**Row 6** K2, p4, k5, p2, k5, p4, k2.

**Row 7** T4B, T4F, p3, C2B, p3, T4B, T4F.

**Row 8** P2, k4, [p2, k3] twice, p2, k4, p2.

Repeat these 8 rows throughout.

## BACK

Using 4.00mm needles, cast on 116(128,132,144) sts.

**Establishment rows** (RS) Moss st 11(14,15,18) sts,

work row 1 of Cable Panel, moss st 11(14,15,18) sts,

work row 1 of Cable Panel, moss st 11(14,15,18) sts,

work row 1 of Cable Panel, moss st 11(14,15,18) sts.

(WS) Moss st 11(14,15,18) sts, work row 2 of

Cable Panel, moss st 11(14,15,18) sts, work row

2 of Cable Panel, moss st 11(14,15,18) sts, work

row 2 of Cable Panel, moss st 11(14,15,18) sts.

These 2 rows set patt.

Keeping patt correct cont working straight until length measures 56 cm, ending on a WS row.

**Shape back neck** (RS) Patt 46(52,54,60) sts, turn, leave rem sts on a holder. Work each side of neck separately.

(WS) Cast off 4(5,5,6) sts, patt to end.

(RS) Cast off 12(14,14,16) sts, patt to end.

(WS) Cast off 5(5,6,6) sts, patt to end.

(RS) Cast off 12(14,14,16) sts, patt to end.

(WS) Patt 1 row.

(RS) Cast off rem 13(14,15,16) sts.

With RS facing, rejoin yarn to rem sts, cast off 24 centre sts, patt to end.

(WS) Cast off 12(14,14,16) sts, patt to end.

(RS) Cast off 4(5,5,6) sts, patt to end.

(WS) Cast off 12(14,14,16) sts, patt to end.

(RS) Cast off 5(5,6,6) sts, patt to end.

(WS) Cast off rem 13(14,15,16) sts.

## LEFT FRONT

Using 4.00mm needles, cast on 58(64,66,72) sts.

**Establishment rows** (RS) Moss st 11(14,15,18) sts,

work row 1 of Cable Panel, moss st 23(26,27,30) sts.

(WS) Moss st 23(26,27,30) sts, work row 2 of

Cable Panel, moss st 11(14,15,18) sts.

These 2 rows set patt.

Keeping patt correct cont working straight until length measures 53 cm, ending on a RS row.

**Shape front neck** (WS) Cast off 12 sts, patt to end.[46(52,54,60)sts]

(RS) Patt to last 2 sts, k2tog.

(WS) P2tog, patt to end.

Rep last 2 rows 3(4,4,5) times, then RS row

1(0,1,0) times more. [37(42,43,48) sts]

Cont working in patt until length measures same as back to sh sh, ending on a WS row.

**Shoulder shaping** (RS) Cast off 12(14,14,16) sts beg next row, then beg foll alt row once.

Patt 1 row.

Cast off rem 13(14,15,16) sts.

## RIGHT FRONT

Using 4.00mm needles, cast on 58(64,66,72) sts.

**Establishment rows** (RS) Moss st 23(26,27,30) sts,

work row 1 of Cable Panel, moss st 11(14,15,18) sts.

(WS) Moss st 11(14,15,18) sts, work row 2 of

Cable Panel, moss st 23(26,27,30) sts.

These 2 rows set patt.

Cont working in patt as set until length measures 22 cm, ending on a WS row.

(RS)(buttonhole row) Moss st 3 sts, yf, k2tog (or p2tog as patt presents), patt to end.

Cont working straight until length measures

32 cm, ending on a WS row.

Repeat buttonhole row.

Cont working straight until length measures 42 cm, ending on a WS row.

Repeat buttonhole row.

Cont working straight until length measures 53 cm, ending on a WS row.

**Shape front neck** (RS) Cast off 12 sts, patt to end.[46(52,54,60)sts]

(WS) Patt to last 2 sts, p2tog.

(RS) K2tog, patt to end.

Rep last 2 rows 3(4,4,5) times, then WS row

1(0,1,0) time more. [37(42,43,48) sts]

Cont working in patt until length measures same as back to sh sh, ending on a RS row.

**Shoulder shaping** (WS) Cast off 12(14,14,16) sts beg next row, then beg foll alt row once.

Patt 1 row.

Cast off rem 13(14,15,16) sts.

## SLEEVES

Using 4.00mm needles, cast on 56(58,60,62) sts.

**Establishment rows** (RS) Moss st 16(17,18,19) sts,

work row 1 of Cable Panel, moss st 16(17,18,19) sts.

(WS) Moss st 16(17,18,19) sts, work row 2 of

Cable Panel, moss st 16(17,18,19) sts.

These 2 rows set patt.

Cont working in patt as set AT THE SAME TIME shape sides (working inc's into moss st patt at sides) as foll: Inc 1 st each end every 6th row

5(5,0,0) times, then 1 st each end every foll 7th row 17(17,22,22) times more. [100(102,104,106) sts,

149(149,154,154) shaping rows]

Cont working straight until length measures 46 cm, ending on a WS row.

Cast off.

## MAKING UP

Press pieces gently on WS using a warm iron over a damp cloth.

Join shoulder seams. Centre sleeves and sew into place.

Join sleeve and side seams.

**Neckband** With RS facing, using 3.75mm needles, beg at centre of right front, pickup and knit 31(33,35,37) sts along front neck

edge, 43(45,47,49) sts across back neck and 31(33,35,37) sts along left front neck edge.

[105(111,117,123) sts]

Work in moss st until length measures 5 cm, ending on a WS row.

Cast off.